


LOGITECH ZONE TRUE WIRELESS



Setup Guide
设置指南

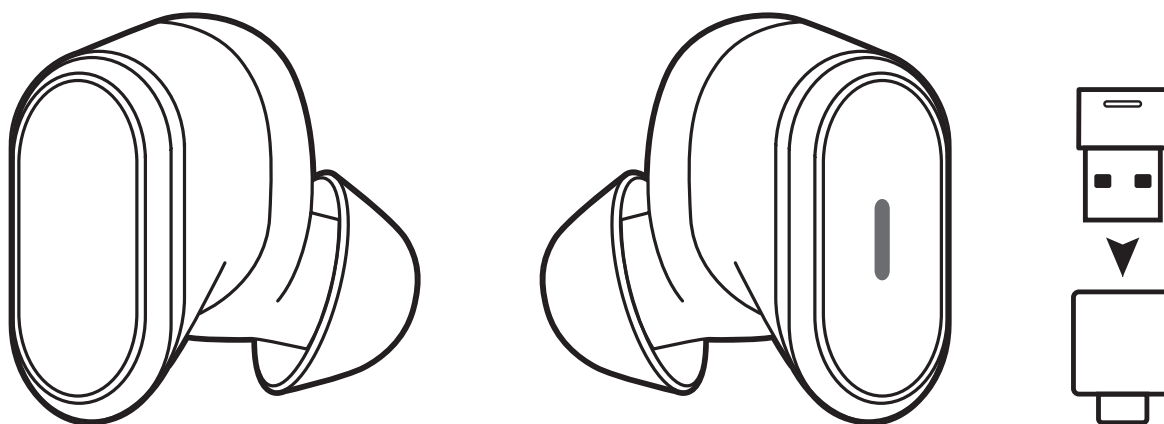

CONTENTS


English	3	简体中文	13
-------------------	---	----------------	----

KNOW YOUR PRODUCT

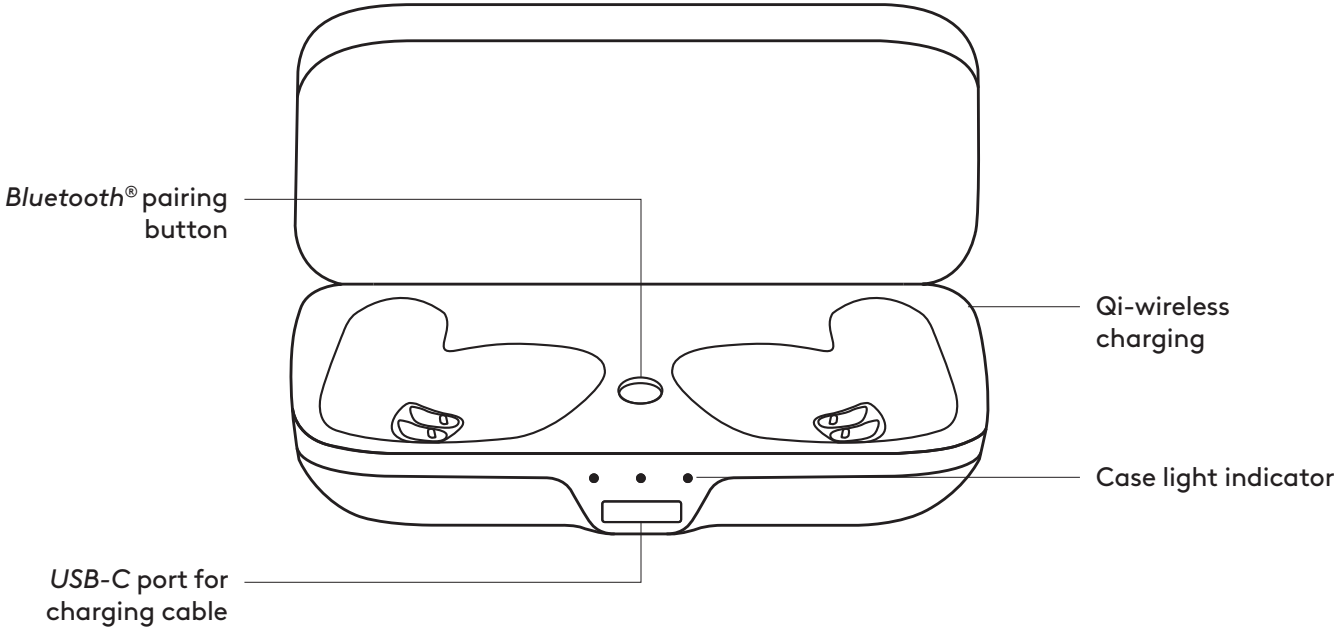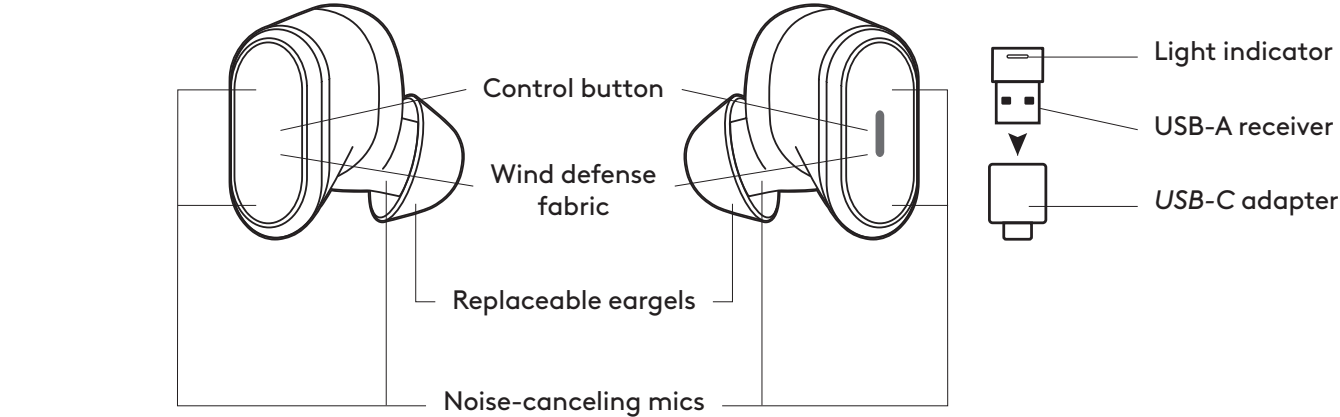

WHAT'S IN THE BOX


1. Left & right ear buds
2. Replaceable eargels (total of 3 pairs):
 - Small left & right eargels without ear fins
 - Medium left & right eargels with ear fins (premounted on the earbuds)
 - Large left & right eargels with ear fins
3. Cloth travel bag
4. Wireless charging case
5. User documentation
6. USB-A receiver
7. *USB-C to A adapter*
8. *USB-C to A charging cable (0.79 ft)*

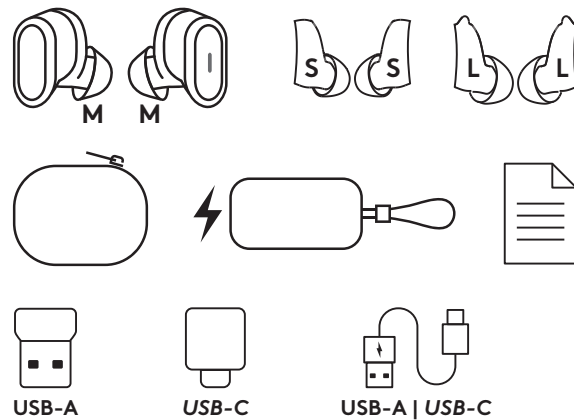

CHARGING

Charging via USB cable

1. Place the earbuds in the charging case and close the lid.
2. Plug the *USB-C* end of the included charging cable into the *USB-C* port on the front of the charging case.
3. Plug the *USB-A* end into the *USB-A* charging port on your computer or plug the *USB-A* end into the *USB-C* adapter and plug the *USB-C* adapter into the *USB-C* port on your computer.
4. Case light Indicator will be a pulsing, white light for charging.
5. Case light Indicator will be solid white when fully charged.
 - 2.5 hrs for full earbuds charge
 - 2.5 hrs for full case charge
 - 5 mins quick charge provides up to 1 hr talk time or listening time*

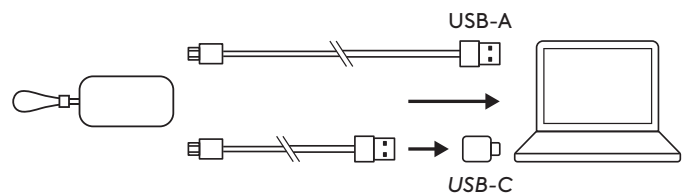


* Battery life was measured from fully charged to automatic shut off, utilizing 50% volume for both talk time and listening time with in-ear detection off.

Charging via Qi wireless charger

1. Place the charging case on top of any Qi-certified wireless charging pad (min. 5 watts).*
2. Case indicator light will be a pulsing, white light when charging.
3. Case Indicator light will be solid white shortly when fully charged.


* Qi wireless charging base is not included.

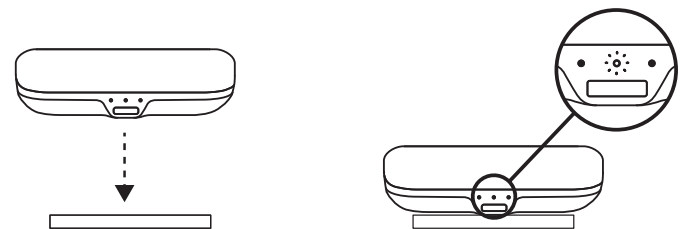

HOW TO SETUP YOUR DEVICE


Pair to computer via USB receiver

1. Remove the earbuds from the charging case.
Insert the earbuds into your ears.
2. **USB-A**
Insert the USB-A receiver into the computer USB-A port.
USB-C
Insert the USB-A receiver into the *USB-C* adapter.
Then insert the adapter into the computer *USB-C* port.
3. Earbuds are pre-paired to the receiver included in the box. Once successfully paired, the light indicator on the receiver will remain solid.

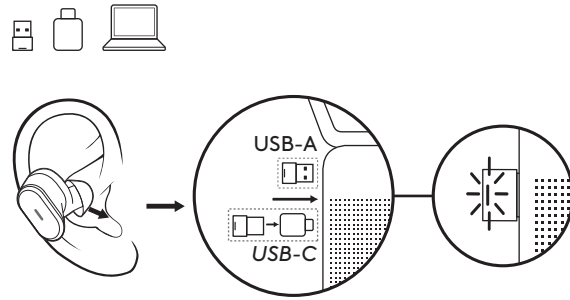

Pair to smartphone via *Bluetooth*®


1. Keep the earbuds in the charging case.
2. Press the *Bluetooth*® pairing button in the charging case for 3 seconds. Case light indicator in the middle will blink in white rapidly.
3. Open *Bluetooth*® settings on your device.
4. Select Zone True Wireless in discoverable devices.

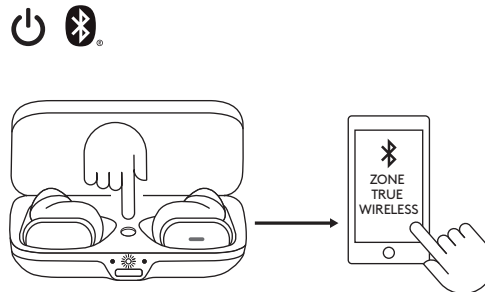

FIND YOUR PERFECT FIT

For optimized performance of ANC and comfort , select among the three eargel sizes (S, M, L) to find the ones that best fit your ears. Earbuds ship with medium eargels.

1. Place the earbuds firmly within your ears.
Adjust angle and depth of the earbuds for the best seal and comfort.



2. Size down if you feel too much pressure on your ear, or size up if the earbuds are too loose.
 - **Note:** It is common to use different sized eargels for different sides of your ears.

Left **Right**



OR




OR





3. Fit Trial

- The earbuds should remain secured and tight even after shaking your head in all directions.
- Play the same music as a fair comparison of noise isolation.

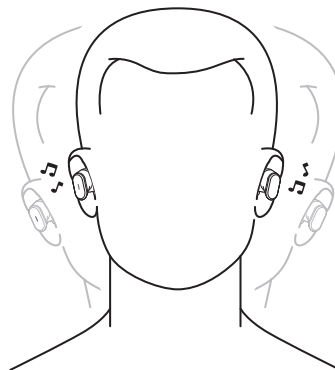


REPLACE THE EARGEL


1. Hold the body of the earbud with one hand.
2. With the other hand, gently pull the whole eargel away from the body of the earbud.

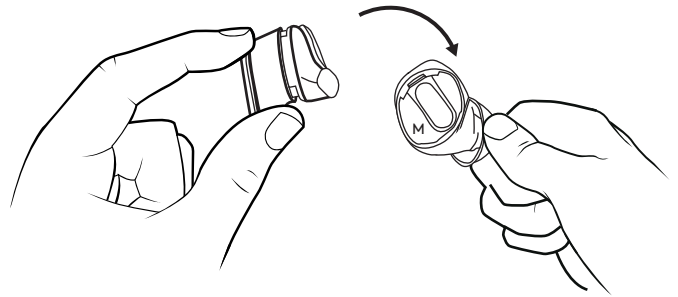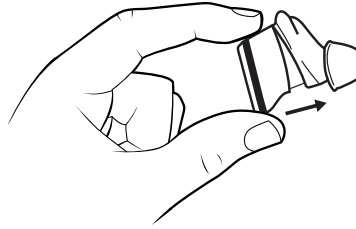

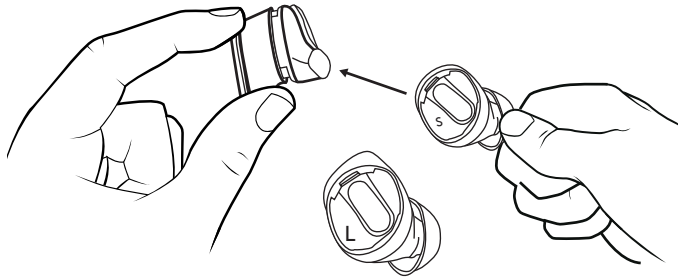


3. Grab alternative sized eargels.



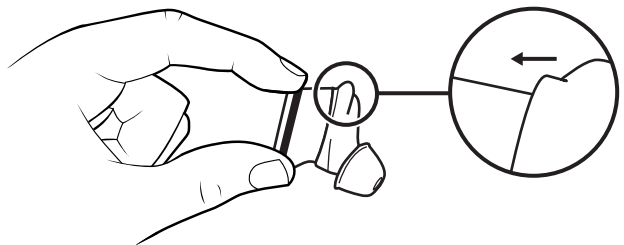


4. Gently stretch the eargel onto the earbud, until there is no gap between eargel and body of the earbud.



CALL AND MUSIC CONTROLS

For UC:	Incoming call situations		Active call situations		Non-call situations	
Action	Left earbud	Right earbud	Left earbud	Right earbud	Left earbud	Right earbud
 Short press	-	Answer call	Mute on / off	End call	Play / Pause	-
 2 seconds press	-	Reject call	-	-	Next song	Invoke voice assistant
 Double taps / press	ANC / Transparency Toggle		ANC / Transparency Toggle		ANC / Transparency Toggle	

For Microsoft Teams:	Incoming call situations		Active call situations		Non-call situations	
Action	Left earbud	Right earbud	Left earbud	Right earbud	Left earbud	Right earbud
 Short press	-	Answer call	Mute on / off	End call	Play / Pause	Invoke Teams
 2 seconds press	-	Reject call	-	Raise hand	Next song	-
 Double taps / press	ANC / Transparency Toggle		ANC / Transparency Toggle		ANC / Transparency Toggle	

Note:

- Teams activities are only functional when Teams is running on an unlocked computer.
- Media control and voice assistant functionality depend on device models and platforms.
- Call activities are always the first priority. When two *Bluetooth®* devices are connected, the last active device will override the other.
- When the earbuds are connected to a smartphone, pressing the right earbud for 2 seconds (under non-call situations) will trigger voice assistant.


Tip: Button customizations and Music EQ controls available in Logi Tune.

ACTIVE NOISE CANCELLATION (ANC)

ANC blocks out the noise around you to help you concentrate on the task at hand.


1. Double tap / press the left / right earbud to switch between ANC and Transparency mode.
2. You can also switch between ANC and Transparency mode via Logi Tune.

— **Note:** Turn ANC off via Logi Tune if needed.

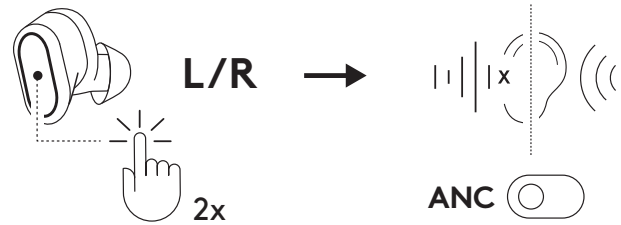


RECEIVER LIGHT INDICATOR


For UC:		
Light		Status
White	Flashing	Incoming call
	Solid	Active call
Red	Solid	Mute on

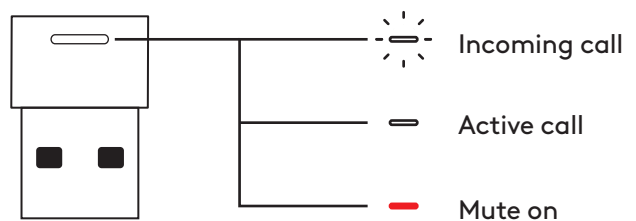

For Microsoft Teams:		
Light		Status
White	Flashing	Incoming call
	Solid	Active call
Red	Solid	Mute on
Purple	Solid	Active Teams call with other device / No call activity / Call on hold

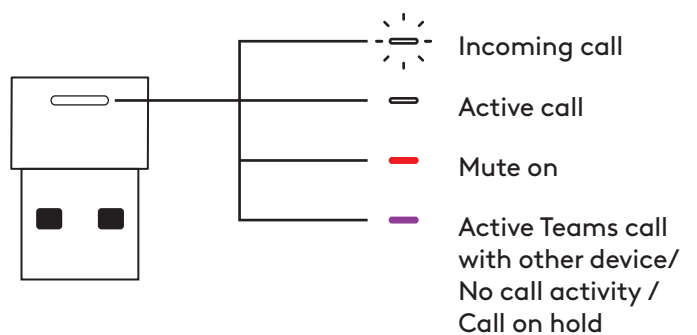

CASE LIGHT INDICATOR

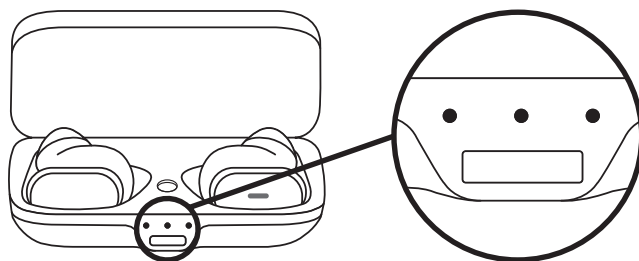

State	Light Indicator				Status
	Left	Middle	Right	Color	
Plug into power source	○	●	●	Solid White	Left earbud is fully charged
	●	○	●		Case is fully charged
	●	●	○		Right earbud is fully charged
	☀	●	●	Pulsing White	Left earbud is charging
	●	☀	●		Case is charging
	●	●	☀		Right earbud is charging
Insert earbuds in the case	☀	●	☀	Pulsing White for 3 seconds	Earbuds inserted
Low battery	●	●	●	Solid Red	Case battery <20%
Long press pairing button for 3 seconds	●	☀	●	Blinking White	Pairing mode
Long press pairing button for 20 seconds	☀	☀	☀	Blinking White	Factory reset

LOGI TUNE

Logi Tune helps boost your earbud performance with periodic software and firmware updates.

Learn more and download Logi Tune at www.logitech.com/tune, the *Apple App Store* or *Google Play*.



Logi Tune



SLEEP SETTINGS

By default, your earbuds will automatically power off when not in use for one hour. Adjust the sleep settings in Logi Tune.

RECONNECT EARBUDS

Reconnect earbuds to receiver via Logi Tune

1. Plug USB-A receiver into computer.
2. Open Logi Tune.
3. Select the receiver from the dashboard.
Press "Reconnect earbuds".
4. To initiate *Bluetooth*® pairing, press and hold the *Bluetooth*® pairing button in the charging case for 3 seconds. The light indicator on the receiver will flash white.
5. Once successfully paired, the light indicator on the receiver will remain solid white.

FACTORY RESET

1. Place the left and right earbuds in the charging case.
2. Long press the *Bluetooth*® pairing button in the case for 20 seconds. The middle case light indicator will blink in white.
3. All three case light indicators will blink in white to confirm the reset.

DIMENSIONS

Earbuds:

Height x Width x Depth: 15.9 x 27.4 x 26.3 mm

Weight (a pair of earbuds): 13 g

Charging case:

Height x Width x Depth: 25.0 x 39.8 x 74.5 mm

Weight: 46 g

Receiver:

Height x Width x Depth: 21.5 x 13.6 x 6.0 mm

Adapter:

Height x Width x Depth: 25.2 x 16.5 x 9.5 mm

USB-A to C charging cable:

0.79 ft (24 cm)

SYSTEM REQUIREMENTS

Works with common calling applications across almost all platforms and operating systems.

Works with *Windows*, *Mac*, or *Chrome* based computer via *USB-C*, *USB-A*, *Bluetooth®* and *iOS* or *Android Bluetooth®* enabled devices.

TECHNICAL SPECIFICATIONS

Microphone Type: Omni-directional, dual MEMS mics array with beamforming plus an inward-facing mic

Frequency response (Earbuds): 20-20kHz (music mode), 100-8kHz (talk mode)

Frequency response (Microphone): 100-8kHz

Battery type: Built-in battery (Lithium ion)

Earbud battery life (talk time): Up to 5 hrs (ANC on), up to 6 hrs (ANC off)

Earbud battery life (listening time): Up to 6 hrs (ANC on), up to 10 hrs (ANC off)

Charging case battery life: 2 full recharges for earbuds



Bluetooth® version: 5.0

Wireless range: Up to 30 m / 100 ft (open field line of sight)

Qi-wireless charging: Works with Qi-certified wireless chargers (min. 5 watts).


www.logitech.com/support/zonetruewireless

了解您的产品

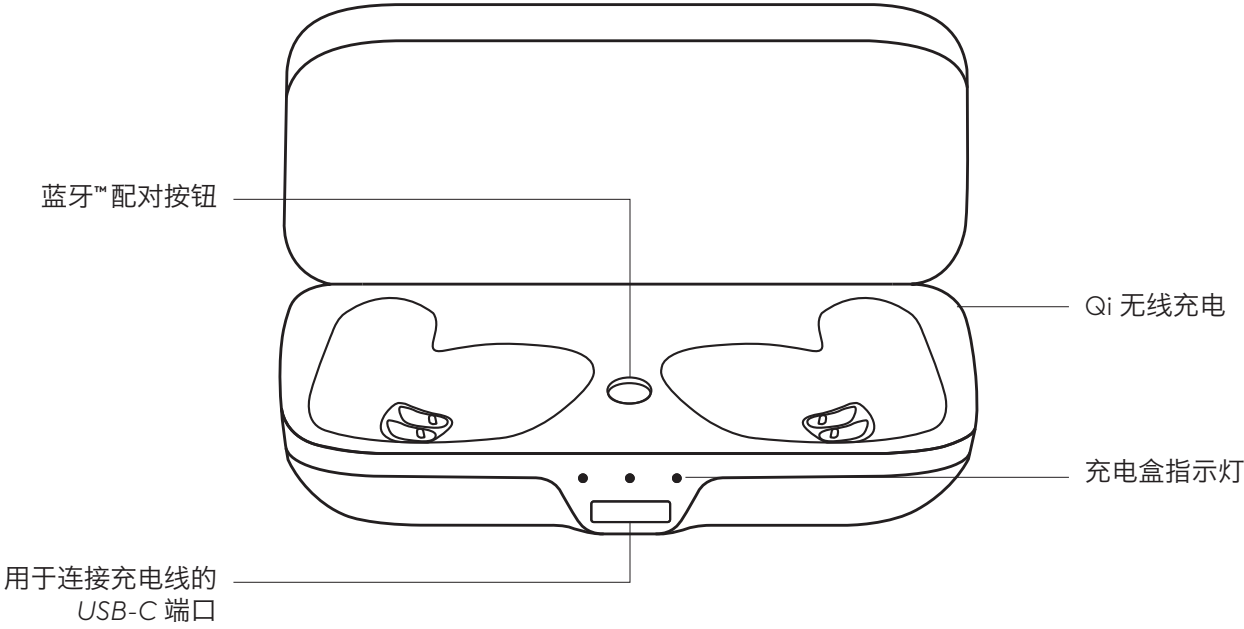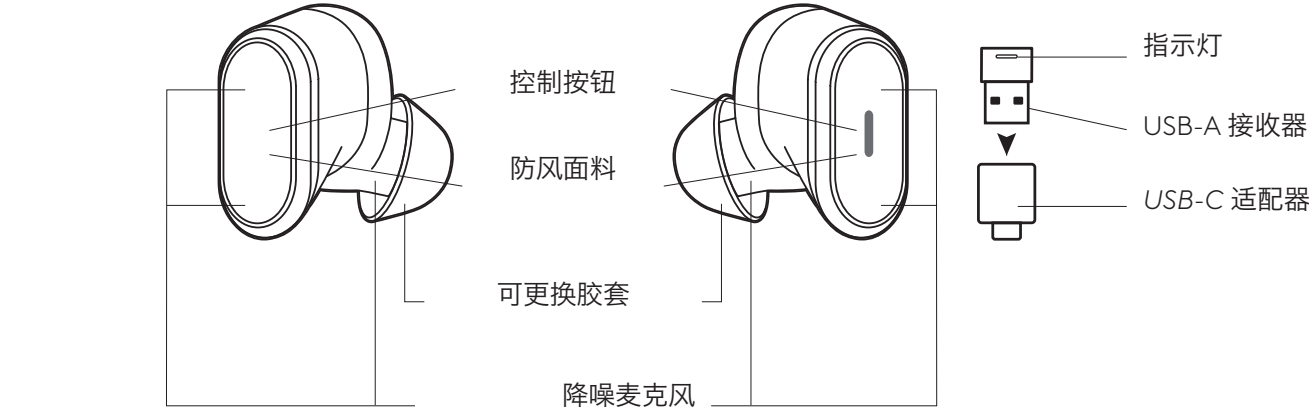

包装内容


1. 左右耳机
2. 可更换胶套（共 3 对）：
 - 不带耳翼的小号左右胶套
 - 带耳翼的中号左右胶套（预装）
 - 带耳翼的大号左右胶套
3. 布制便携包
4. 无线充电盒
5. 用户文档
6. USB-A 接收器
7. USB-C 至 USB-A 适配器
8. USB-C 至 USB-A 充电线（约 24 厘米）

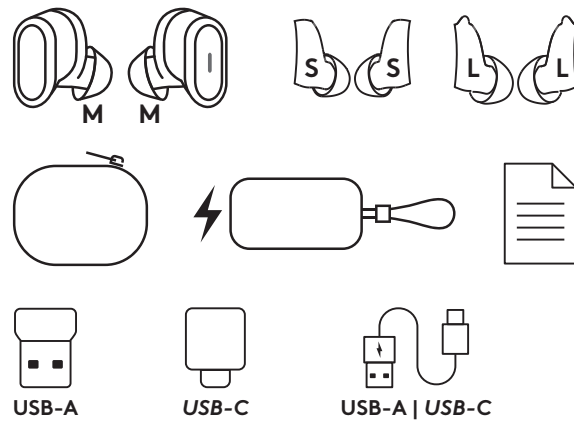

充电

通过 USB 线缆充电

1. 将耳机放入充电盒，然后关闭盒盖。
2. 将随附充电线的 USB-C 端插入充电盒正面的 USB-C 端口。
3. 将线缆的 USB-A 端插入电脑的 USB-A 充电端口，或将 USB-A 端插入 USB-C 适配器，然后将 USB-C 适配器插入电脑的 USB-C 端口。
4. 充电盒指示灯将闪烁白色，表示正在充电。
5. 充电完成后，充电盒指示灯将常亮白色。
 - 约 2.5 小时充满耳机
 - 约 2.5 小时充满充电盒
 - 5 分钟快速充电可提供最长 1 小时通话或收听时间*

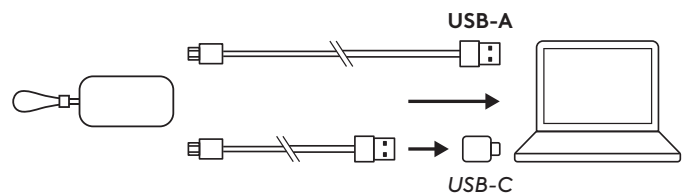


*电池使用时长的测量为从完全充电到自动关闭，在关闭入耳检测的情况下，通话时间和收听时间都使用了50%的音量。入耳式检测功能。

通过 Qi 无线充电器充电

1. 将充电盒放在 Qi 认证无线充电板上（最低 5 瓦）。*
2. 充电时，充电盒指示灯将闪烁白色。
3. 充电完成后，充电盒指示灯将短暂常亮白色。

* Qi 无线充电底座需另购。

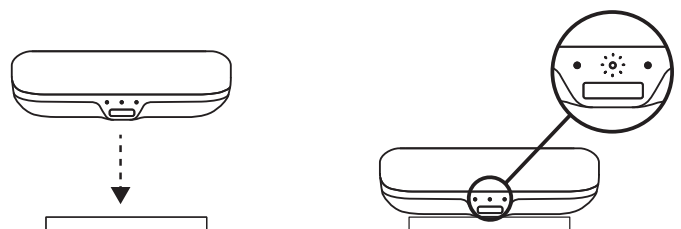

设备设置

通过 USB 接收器与电脑配对

1. 从充电盒中取出耳机。将耳机插入耳中。


2. USB-A

将 USB-A 接收器插入电脑的 USB-A 端口。

USB-C

将 USB-A 接收器插入 USB-C 适配器。将适配器插入电脑的 USB-C 端口。

3. 耳机已与包装中的接收器预先配对。成功配对后，接收器指示灯将常亮。

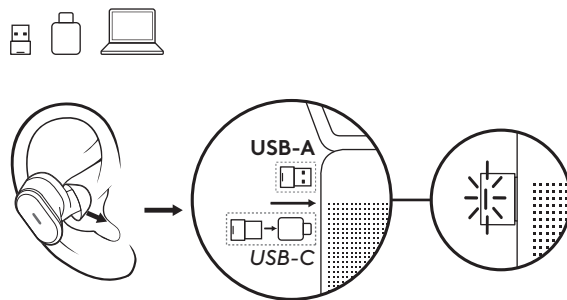


通过蓝牙™ 与智能手机配对

1. 将耳机放入充电盒。

2. 按住充电盒中的蓝牙™ 配对按钮 3 秒钟。充电盒的中央指示灯将快速闪烁白色。

3. 在设备上打开蓝牙™ 设置。


4. 在可发现设备中选择 Zone True Wireless。

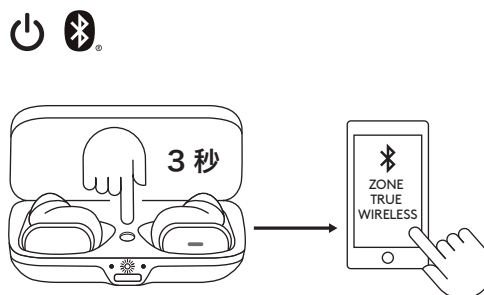

找到舒适佩戴搭配


为找到理想的降噪性能和舒适度，请从三种胶套尺寸 (S、M、L) 中选择适合您的尺寸。耳机预装中号胶套。

1. 将耳机稳妥地放入耳中。调整耳机的角度和深度以获得理想的密封性和舒适度。




2. 如果觉得耳部压力过大，请选择小尺寸胶套，如果耳机过松，则选择大尺寸胶套。

— 注：双耳使用不同尺寸的胶套是正常现象。

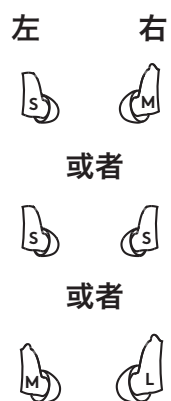



3. 贴合测试

- 向各个方向摇头后，耳机应仍保持稳固和紧实。
- 播放同样的音乐作为同等条件的噪音隔离对比。

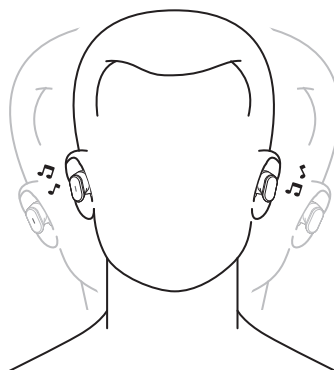


更换胶套


1. 一只手拿住耳机本体。
2. 另一只手轻轻将整个胶套从耳机本体上拉下。

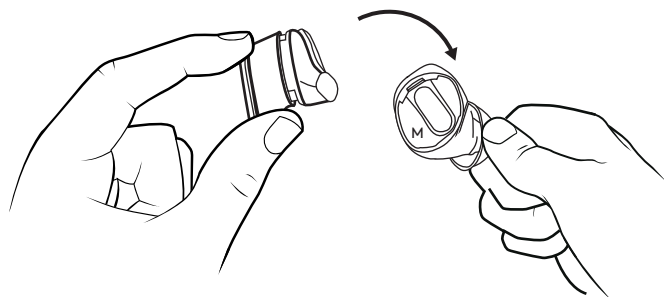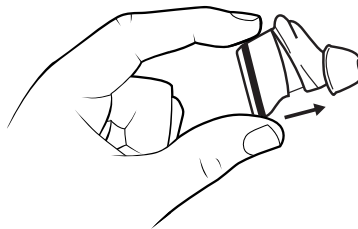

3. 拿起其他尺寸的胶套。

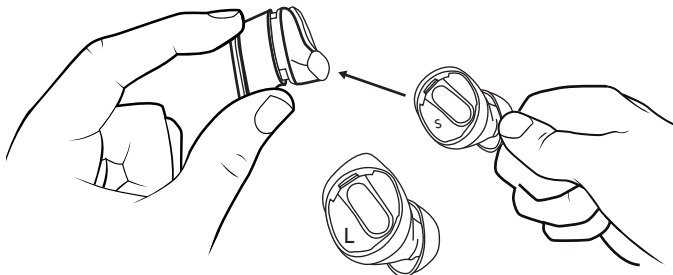

4. 轻轻地将胶套套在耳机上，直至胶套和耳机本体紧密贴合。

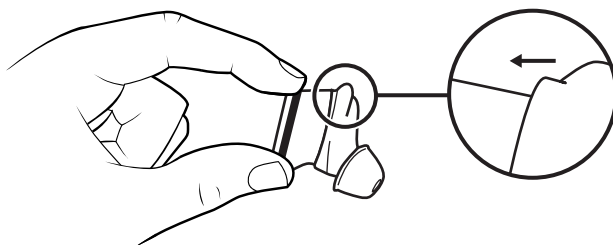

通话和音乐控制

UC:	通话呼入场景		通话场景		非通话场景	
操作	左侧耳机	右侧耳机	左侧耳机	右侧耳机	左侧耳机	右侧耳机
 短按	-	接听通话	开启/关闭静音	结束通话	播放/暂停	-
 按 2 秒	-	拒绝接听	-	-	下一首	调用语音助手
 轻点/按两次	ANC/通透模式切换		ANC/通透模式切换		ANC/通透模式切换	

Microsoft Teams:	通话呼入场景		通话场景		非通话场景	
操作	左侧耳机	右侧耳机	左侧耳机	右侧耳机	左侧耳机	右侧耳机
 短按	-	接听通话	开启/关闭静音	结束通话	播放/暂停	激活 Teams
 按 2 秒	-	拒绝接听	-	举手	下一首	-
 轻点/按两次	ANC/通透模式切换		ANC/通透模式切换		ANC/通透模式切换	


- 注:
- 仅当 Teams 运行于未锁定的电脑上时，Teams 活动才有效。
 - 媒体控制和语音助手功能依设备型号和平台而定。
 - 通话活动始终为最高优先级。连接两个蓝牙™设备时，最近的活动设备将优先于另一个设备。
 - 耳机连接智能手机时，长按右耳机 2 秒（非通话状态）将触发语音助手。

提示：在 Logi Tune 中可以自定义按钮功能和音乐均衡器控制。

主动降噪 (ANC)


ANC 可以阻隔您周围的噪音，帮助您专注于手头的任务。

- 1. 轻点/按两次左/右耳机便可在 ANC 和通透模式之间切换。
- 2. 还可以通过 Logi Tune 在 ANC 和通透模式之间切换。
- **注：**如果需要，可通过 Logi Tune 关闭 ANC。

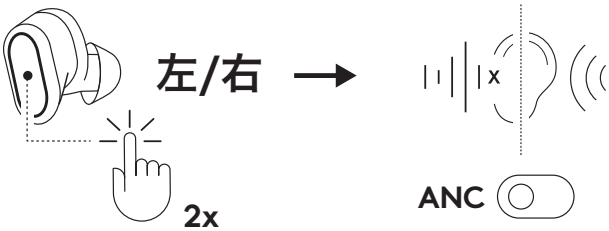


接收器指示灯


UC:		
指示灯		状态
白色	闪烁	通话呼入
	常亮	活动通话
红色	常亮	开启静音

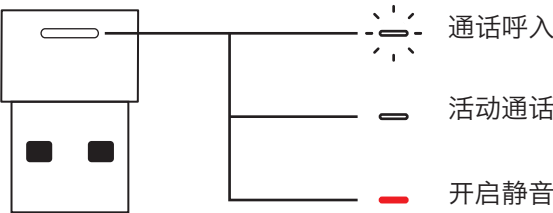

Microsoft Teams:		
指示灯		状态
白色	闪烁	通话呼入
	常亮	活动通话
红色	常亮	开启静音
紫色	常亮	与其他设备的活动 Teams 通话/无通话活动/通话保持

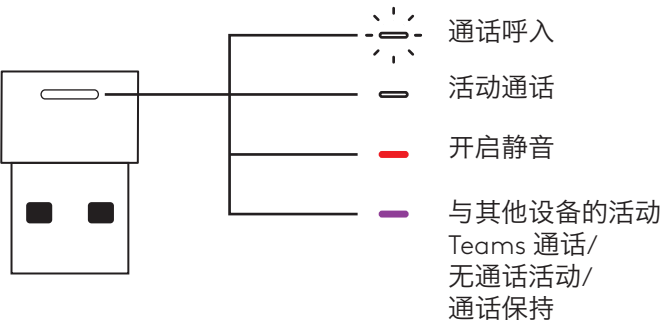

充电盒指示灯

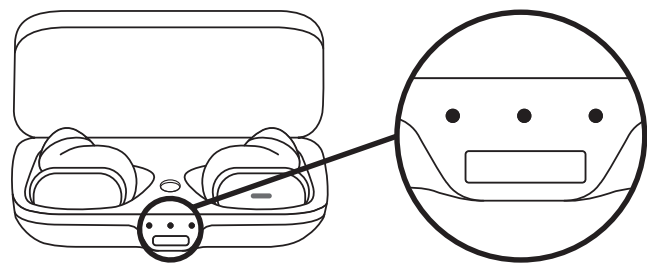

使用情况	指示灯				状态
	左	中	右	颜色	
插入电源	○	●	●	常亮白色	左耳机已充满电
	●	○	●		充电盒已充满电
	●	●	○		右耳机已充满电
	☀	●	●	闪烁白色	左耳机正在充电
	●	☀	●		充电盒正在充电
	●	●	☀		右耳机正在充电
将耳机插入充电盒	☀	●	☀	闪烁白色 3 秒	耳机已插入
低电量	●	●	●	常亮红色	充电盒电量 <20%
长按配对按钮 3 秒	●	☀	●	闪烁白色	配对模式
长按配对按钮 20 秒	☀	☀	☀	闪烁白色	恢复出厂设置

LOGI TUNE

Logi Tune 通过定期的软件和固件更新帮助改善耳机性能。

了解更多信息并下载 Logi Tune 请访问
www.logitech.com/tune、Apple App Store 或
Google Play。



Logi Tune



睡眠设置

默认情况下，耳机会在闲置一小时后自动关机。
在 Logi Tune 中调整睡眠设置。

重新连接耳机

通过 Logi Tune 重新连接耳机和接收器

1. 将 USB-A 接收器插入电脑。
2. 打开 Logi Tune。
3. 从仪表板中选择接收器。选择“重新连接耳机”。
4. 要启动蓝牙™ 配对，请按住充电盒中的蓝牙™ 配对按钮 3 秒钟。接收器上的指示灯将闪烁白色。
5. 成功配对后，接收器指示灯将常亮白色。

恢复出厂设置

1. 将左右耳机放入充电盒。
2. 按住充电盒中的蓝牙™ 配对按钮 20 秒。充电盒的中央指示灯将闪烁白色。
3. 充电盒全部三个指示灯将闪烁白色以确认重置。

规格

耳机:

高 x 宽 x 深: 约 15.9 x 约 27.4 x 约 26.3 毫米

重量 (一对耳机): 约 13 克

充电盒:

高 x 宽 x 深: 约 25.0 x 约 39.8 x 约 74.5 毫米

重量: 约 46 克

接收器:

高 x 宽 x 深: 约 21.5 x 约 13.6 x 约 6.0 毫米

适配器:

高 x 宽 x 深: 约 25.2 x 约 16.5 x 约 9.5 毫米

USB-A 至 C 充电线:

约 24 厘米

系统要求

兼容多数平台和操作系统的常用通话应用程序。

通过 *USB-C*、*USB-A*、*蓝牙™* 兼容 *Windows*、*Mac* 或 *Chrome* 电脑，并兼容支持蓝牙™ 的 *iOS* 或 *Android* 设备。

技术规格

麦克风类型: 具有波束形成功能的全向双 MEMS 麦克风阵列以及面向内部的麦克风

频率响应 (耳机): 20-20kHz (音乐模式), 100-8kHz (通话模式)

频率响应 (麦克风): 100-8kHz

电池类型: 内置电池 (锂离子)

耳机电池使用时长 (通话时间): 最长 5 小时 (ANC 开启), 最长 6 小时 (ANC 关闭)

耳机电池使用时长 (播放时间): 最长 6 小时 (ANC 开启), 最长 10 小时 (ANC 关闭)

充电盒电池使用时长: 为耳机完全充电 约 2 次

蓝牙™ 版本: 5.0

无线接收范围: 最远 30 米 (无遮挡)

Qi 无线充电: 支持 Qi 认证的无线充电器 (最低 5 瓦)。

电池使用时长的测量为从完全充电到自动关闭, 在关闭入耳检测的情况下, 通话时间和收听时间都使用了 50% 的音量。

www.logitech.com/support/zonetruewireless

版权所有 © 2023 罗技。罗技、Logi、Logitech 和罗技标志为罗技欧洲公司和/或其美国及其他国家/地区附属公司的商标, 并或已注册。Apple、Apple 徽标、iOS 和 Mac 是 Apple Inc. 在美国和其他国家/地区注册的商标。App Store 是 Apple Inc. 的服务商标。Android、Chrome、Google Play 和 Google Play 徽标是 Google LLC 的商标。蓝牙™ 文字商标和标志为 Bluetooth SIG, Inc. 所有的注册商标、罗技对此类商标和标志的所有使用均已获得授权。USB-C、Windows 和所有其它第三方商标均是其各自所有者的财产。

WEB-621-002021 009